



Breather Membrane Lap Tape (BMLT)


For Breather Membranes

Novia® Breather Membrane Lap Tape (BMLT) is a sealing and bonding tape which has a high strength acrylic dispersion adhesive and has a non-woven polypropylene carrier. **Novia® BMLT** is suitable for use in temperatures as low as -10°C with care. This tape is suitable for overlaps and joints on Breather Membranes within both roof and wall applications to seal all membrane overlaps to protect against external environmental conditions and improve airtightness.

Novia® BMLT can be used with Novia Breather Membranes as an edge and lap sealing tape. To fully complete a breather membrane seal and further reduce the air-leakage of the construction, this tape should be used in conjunction with **Novia® Double Sided Adhesive Tape**.

Novia® BMLT is required for use with some breather membranes in accordance with BS 5534 wind uplift requirements. Please see individual **Novia® Breather Membrane** technical datasheets for guidance and geographical data.

An example installation for a Breather Membrane

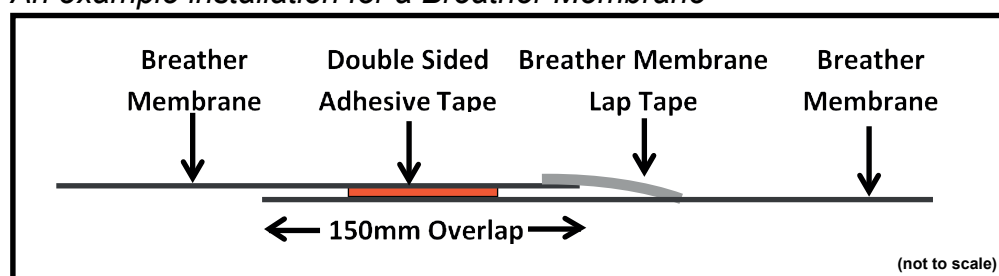

Nominal Technical Data*

	Value	Units	Test Method
Roll Width	50 / 75	mm	
Roll Length	25	m	
Roll Weight	0.55 / 0.80	kg	
Elongation	≥ 50 (40%)	N/25mm	DIN EN 14410
Thickness	0.55 - 0.60	mm	DIN EN 1942
Peel Adhesion	≥30	N/25mm	DIN EN 1939**
Installation Temperature	From -10	°C	Recommended +5
Temperature Resistance	-30 to + 100	°C	

*All data based on average values. **With variances.

This datasheet represents the latest understanding of the subject. However, it is for the ultimate user to determine suitability of Novia products within specific applications. The advice and information we have provided is general in nature, and is subject to future revision.

NOTE: COSHH safety datasheets available upon request.

Date Published: December 2023. Novia's most recently published datasheet supercedes any previous versions which may still be in circulation.



Available roll sizes:

50mm x 25m

75mm x 25m

Other sizes are available upon request, MOQ and lead-times apply.

Installation Temperature:

Suitable for use in temperatures as low as -10°C, with care.



Scan the QR code below to visit the product webpage



DS1223_BMLTape