


NOVIA

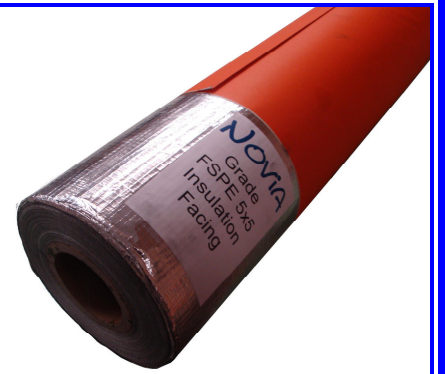

NOVIA FSPE - insulation facing membrane

General

NOVIA FSPE is most commonly used as an insulation facing material. The 18 micron aluminium foil coating can offer enhanced U values within roof and wall constructions if the membrane faces a cavity of at least 20mm.

NOVIA FSPE

This material is a 5 x 5 mm scrim reinforced 18 micron aluminium foil / PE laminate, achieving a Class "0" fire rating to BS 476 when used as a facing on suitable insulation substrates.

Sizes available..... 1000 mm x 250 m & 1200 mm x 250 m
Moisture vapour resistance..... 1710 MNs/g
Surface spread of flame..... Class "0" (BS 476) on suitable insulation

NOVIA LTD, Unit 12 Heronden Road, Parkwood Industrial Estate, Maidstone, Kent. ME15 9YR
Tel (01622) 678952 Fax (01622) 679025 e-mail: sales@novia.co.uk
Registered Office: Star House, Star Hill, Rochester. ME1 1UX
Company reg no. 3229379 VAT reg no. GB 662 277131

DS0713_FSPEInf