


**Novia® Double-Sided Butyl Tape** is a high performance polyisobutylene (PIB) based sealing tape. The material can be used in a wide range of applications where products or installations need to be sealed against air and water ingress, particularly Air and Vapour Control Layers (AVCL). **Novia® Double-Sided Butyl Tape** is cost effective, non-toxic and requires no tools to apply. All rolls are simple to use with little waste and no mess.

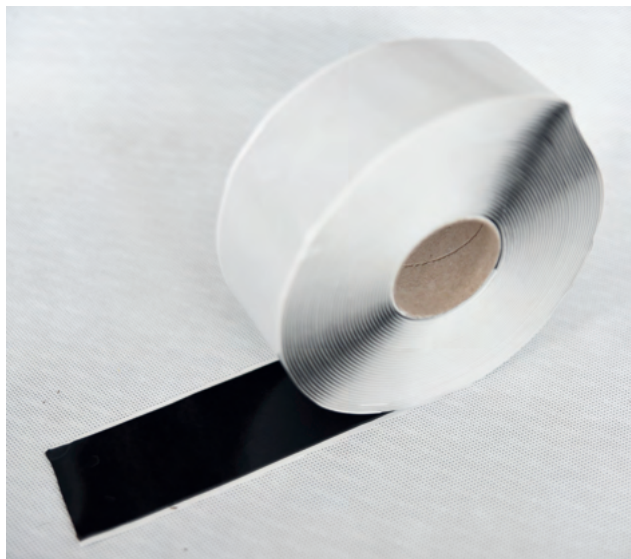


**Novia® Double-Sided Butyl Tape** should be used in all AVCL and Damp Proof Membrane (DPM) applications for overlap seals. For the best results for airtightness and prevention of interstitial condensation, Novia® advises the use of both a single sided tape and butyl tapes on all AVCL and DPM installations.

All surfaces should be dry, clean and free from debris, frost and grease before installation. For guidance on what size should be used, please see the relevant membrane datasheets.

Available roll sizes are -

50mm x 10m x 1.5mm    30mm x 30m x 1.5mm    15mm x 22.5m x 2.0mm

*An example installation in an AVCL (plan view)*

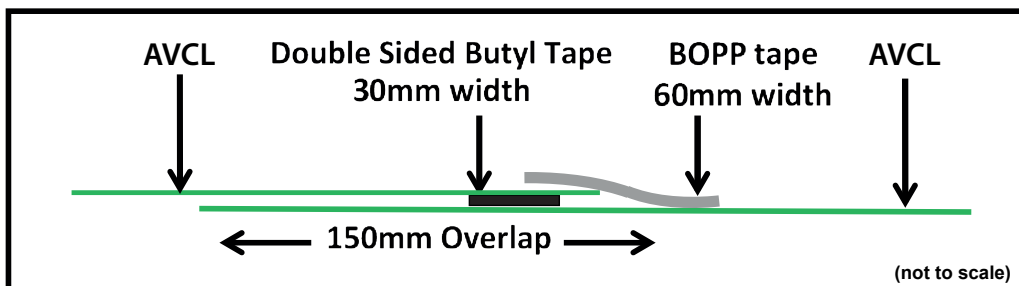

### Nominal Technical Data \*

	Value	Units	Test Method
Tensile Adhesion	19	N/cm <sup>2</sup>	
Shear Adhesion	13	N/cm <sup>2</sup>	
Service Temperature Range	-40 to +90	°C	
Application Temperature Range	+5 to +40	°C	
Specific Gravity	1.6	cm <sup>3</sup>	DIN EN ISO 10563
Shelf Life	24 Months in ambient conditions		

Scan the QR code below to visit the product webpage



\*All data based on average values

This datasheet represents the latest information available. However it is for the ultimate user to determine suitability of our products within specific applications. The advice and information we have provided is general in nature, and is subject to future revision.