

Novia® Double-Sided Butyl Tape is a high performance jointing and sealing tape suitable for a wide range of applications where Novia® membranes require sealing against air and water vapour ingress. This product is not suitable for use as the load-bearing element of a system, and all Air and Vapour Control Layers (AVCL) and Damp Proof membranes (DPM) will also require mechanical fixings.

Novia® Double-Sided Butyl Tape is cost effective, simple to use and produces little waste or mess. The product has good adhesion to a wide range of substrates, and high initial tack.

Novia® Double-Sided Butyl Tape should be used in conjunction with a single sided lap tape, such as **Novia®**


BOPP tape for the best results. This will maximise airtightness and minimise interstitial condensation within the installation

All surfaces should be dry, clean and free from debris, frost and grease. Unprepared surfaces will not seal correctly. The use of a suitable cleaning agent may be required. See individual product datasheets for guidance on which size to use for different applications.

Available roll sizes are -

50mm x 10m x 1.5mm 30mm x 30m x 1.5mm 15mm x 22.5m x 2.0mm

An example installation in an AVCL

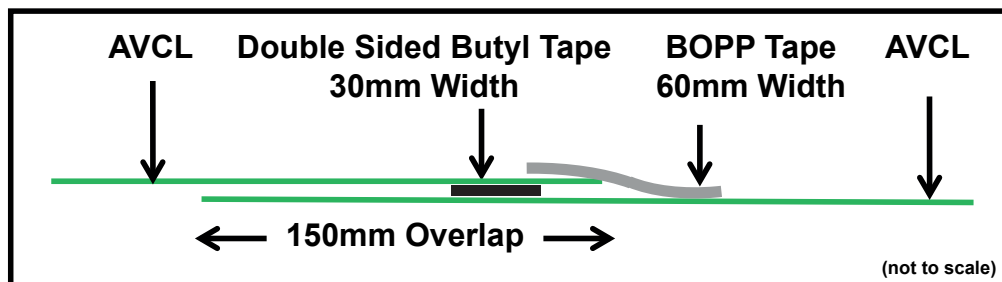

Nominal Technical Data *

	Value	Units
Tensile Adhesion	19	N/cm ²
Shear Adhesion	13	N/cm ²
Service Temperature Range	-40 to +90	°C
Application Temperature Range	+5 to +40	°C
Specific Gravity	1.6	g/cm ³
Shelf Life	24 Months in ambient conditions	

*All data based on average values

This datasheet represents the latest information available. However it is for the ultimate user to determine suitability of our products within specific applications. The advice and information we have provided is general in nature, and is subject to future revision.



Scan the QR code below to visit the product webpage



DS0822_DSB_Tape